
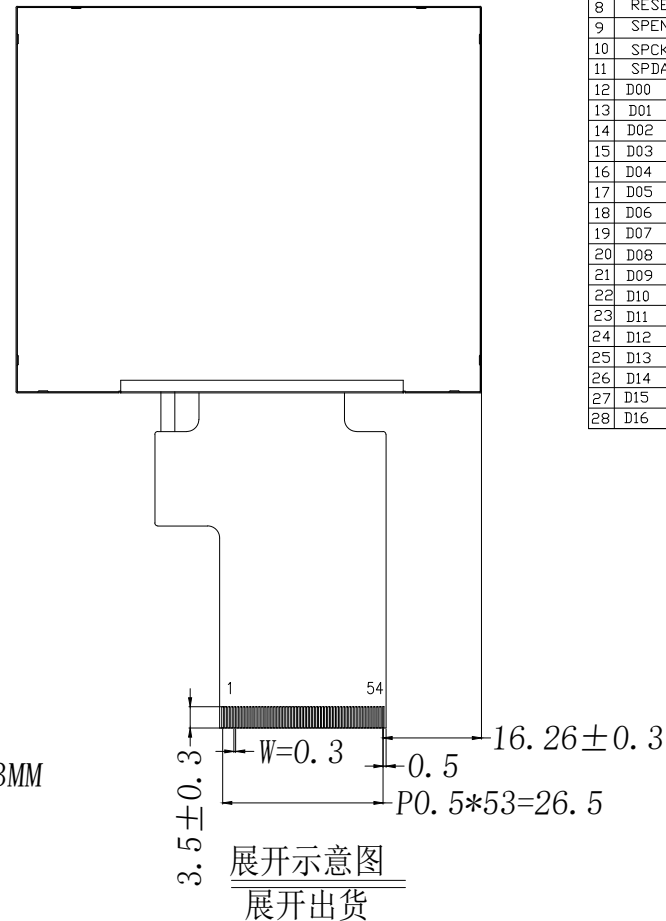
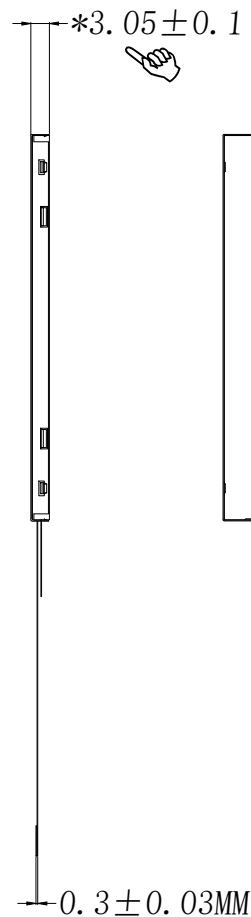


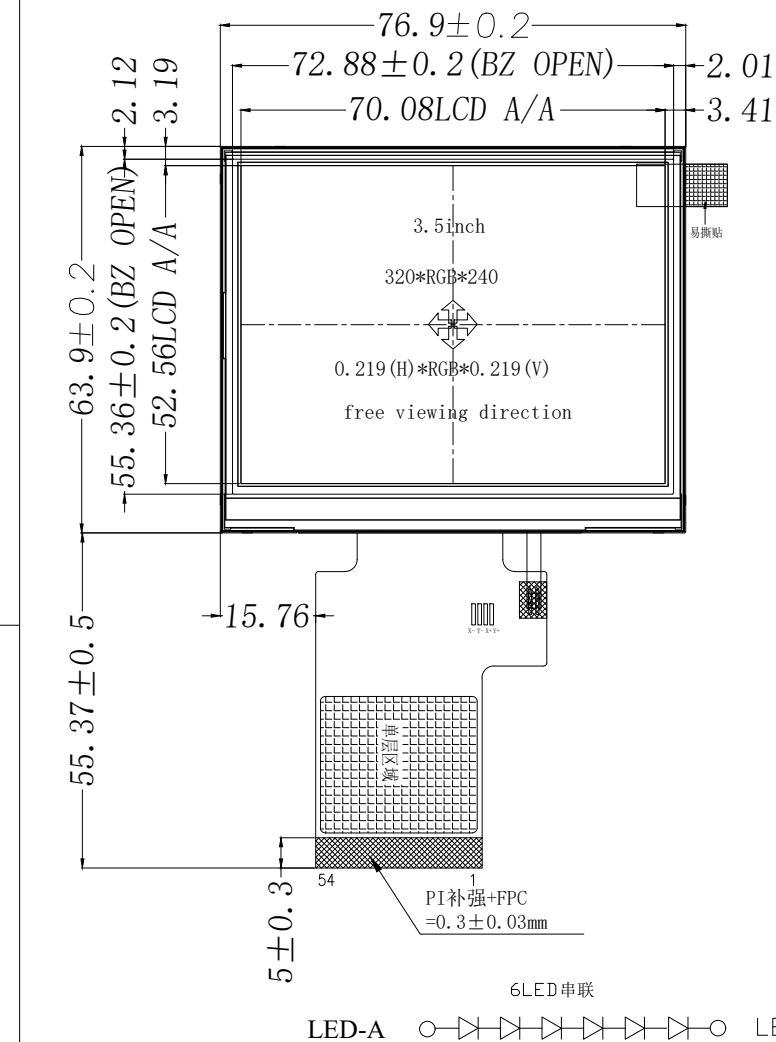

PIN DESCRIPTION

1	LEDK	29	D17
2	LEDK	30	D18
3	LEDA	31	D19
4	LEDA	32	D20
5	NC	33	D21
6	NC	34	D22
7	NC	35	D23
8	RESET	36	HSYNC
9	SPENA	37	VSYNC
10	SPCK	38	CLK
11	SPDA	39	NC
12	D00	40	NC
13	D01	41	VDD
14	D02	42	VDD
15	D03	43	NC
16	D04	44	NC
17	D05	45	NC
18	D06	46	NC
19	D07	47	NC
20	D08	48	NC
21	D09	49	NC
22	D10	50	NC
23	D11	51	NC
24	D12	52	DEN
25	D13	53	GND
26	D14	54	GND
27	D15		
28	D16		

LCD Type	3.5" TFT, Transmissive, Normally white, TN
Resolution	320(RGB)*240
View Direction	all OCLOCK
Driver IC	ST7272A
Color Depth	16.7M
Interface Types	TTL, RGB24bit
Operating voltage	3.3V
TP/Lens	Without
Backlight LEDs	6 LEDs, 20mA, 18.6V
Surface luminance	450~500 cd/m2
Operating temperature	-20 °C ~ +70 °C
Storage temperature	-30 °C ~ +80 °C
Storage Humidity	60% 90% max

" " Need to pay attention to			the key size with *			东莞市一众显示科技有限公司 DONG GUAN TEAM SOURCE DISPLAY TECH. CO., LTD.			
版本 (Version)	变更记录 (Change History)		日期 (Date)	视角 (View):	比例 (Proportion):	1 : 1	设计 (DESIGN)	审核 (AUDITING)	批准 (APPROVED)
A0	new design		2018.12.25	单位 (Unit):	MM	1 / 1			
A1	new backlight and FPC		2019.4.3	产品型号 (Product Type):	TST035QVHS-46			Aron	
				图纸版本 (Version):	A1			2019.4.3	