

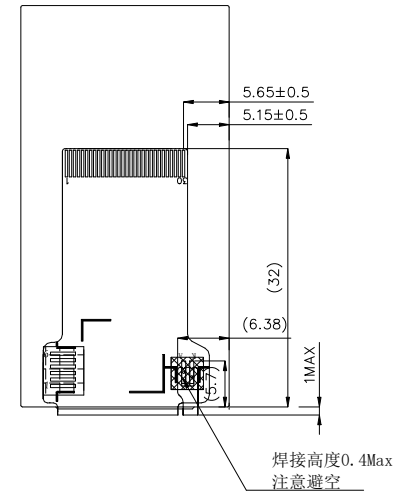
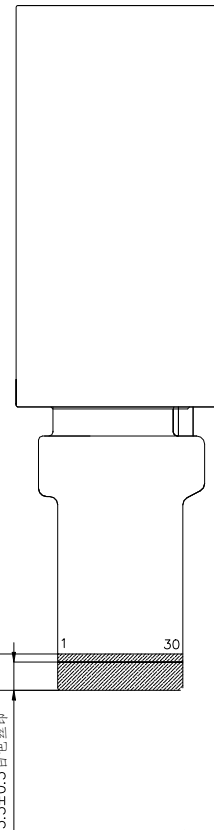
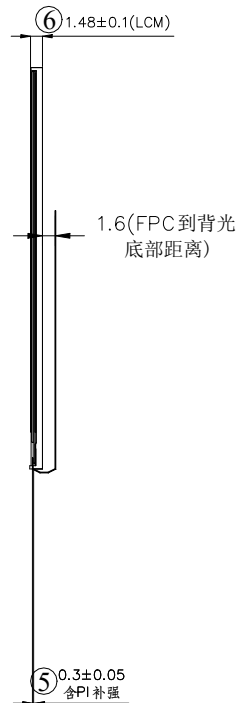


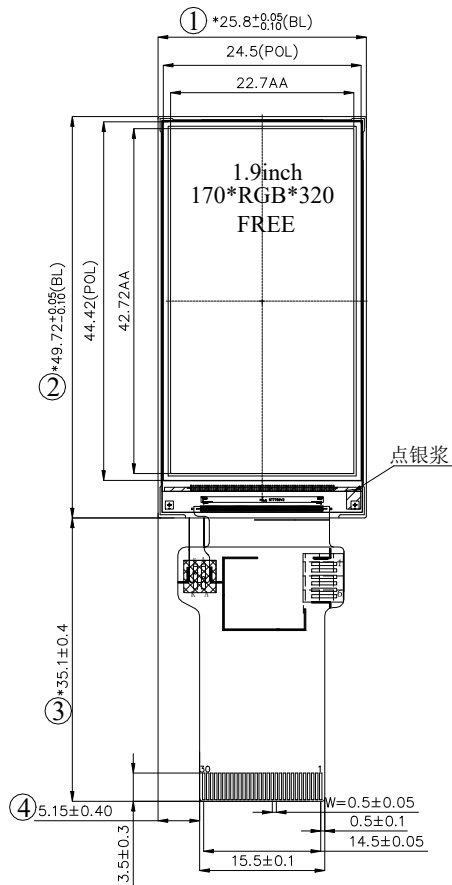


FPC弯折示意图
弯折出货

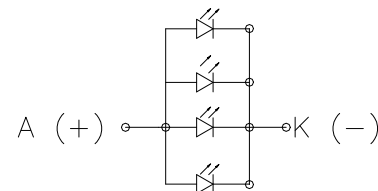

背光电路图(CIRCUIT DIAGRAM)

VF=3.2V IF=60mA



NOTES:

1. GENERAL TOLERANCE: ± 0.2
2. () REFERENCE DIMENSION
3. Important dimension: ①~⑨

LCD Type	1.9"TFT,Transmissive
	Normally black
Resolution	170(RGB)*320
View Direction	All o'clock
LCD driver IC	ST7789V2
Color depth	65K/262K
Interface types	MCU8-bit
Operating voltage	2.8V
With TP/Lens	without
Backlight	4 LEDs,60mA(typ)
Surface luminance	350 cd/m ² (typ)
Operating temperature	-20°C~70°C
Storage temperature	-30°C~80°C
Color chromaticity	[white] x/y:

版本 (Version)	变更记录(Revise History)	日期(Date)	设计(DESIGN)	Zahi
A0	Initial release	2022.03.02	审核(CHECKED)	Aron
			批准(APPROVED)	Aron
			客户承认 (CUSTOMER APPROVAL)	

 一众显示 TEAM SOURCE DISPLAY		
TITLE: LCM	页面(Page) 单位(Unit)	1 / 1 mm
Drawing No. TST019QVBS-02B	比例(SCALE) 角度(Angle)	1 : 1 

N0.	Pin Define
1	GND
2	VCI
3	IM2
4	IM1
5	RESET
6	CS
7	DC(SPI-SCL)
8	WR(SPI-RS)
9	RD
10	SDA
11	DB0
12	DB1
13	DB2
14	DB3
15	DB4
16	DB5
17	DB6
18	DB7
19	SDO
20	LED-A
21	LED-K1
22	LED-K2
23	LED-K3
24	LED-K4
25	GND
26	TP_RST
27	TP_SCL
28	TP_SDA
29	TP_INT
30	GND