
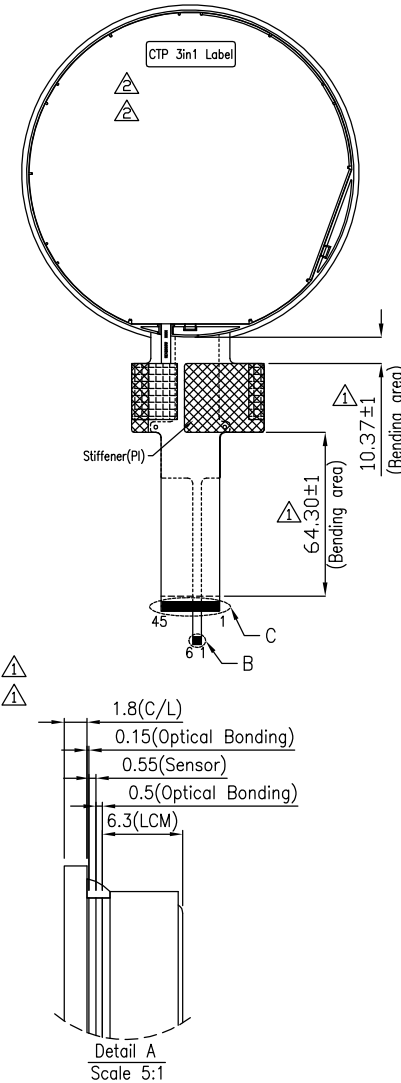
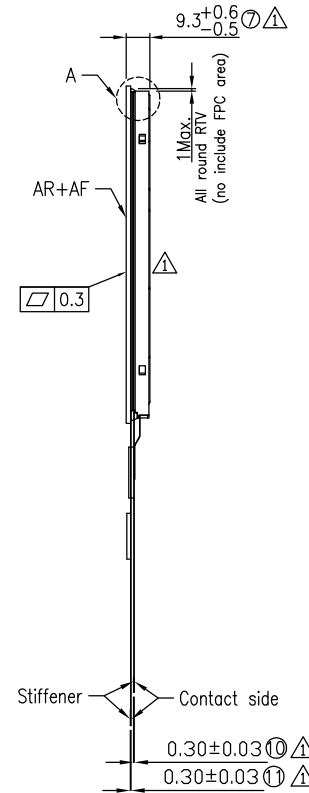
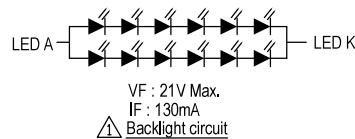

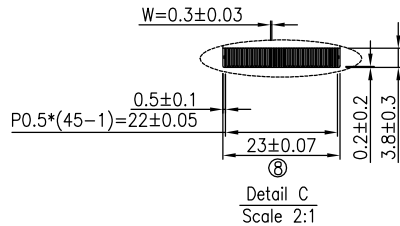
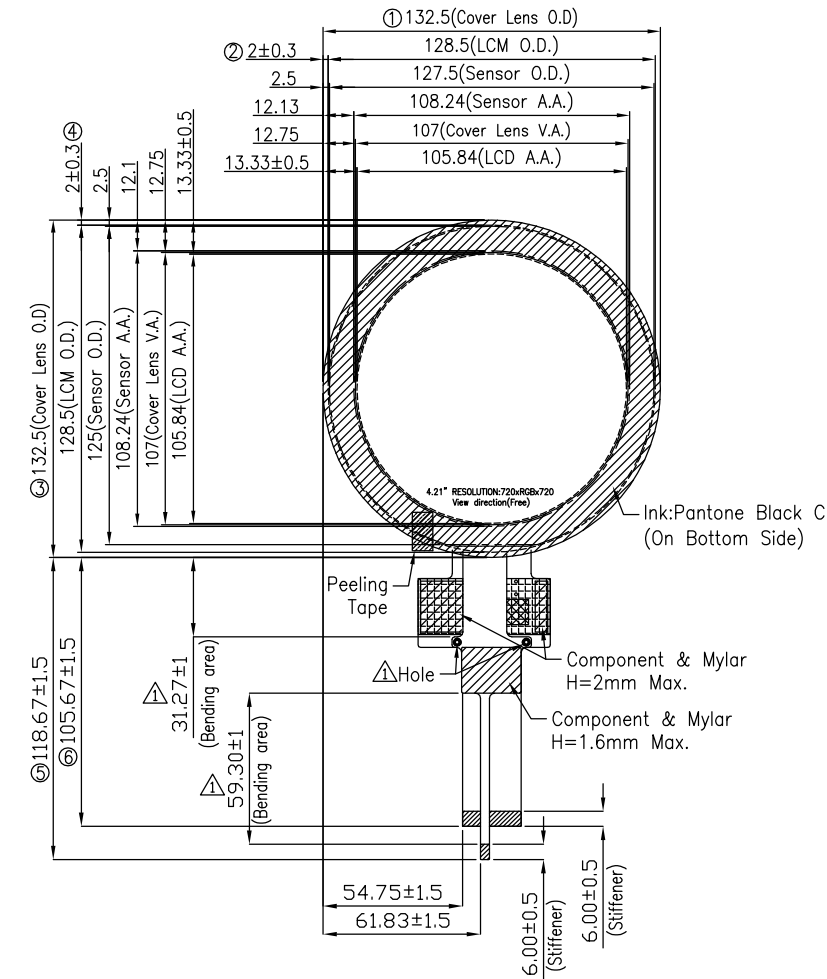




Pin Define			
No.	Pin name	No.	Pin name
1	NC	24	DB8
2	VDD	25	DB9
3	VDD	26	DB10
4	GND	27	DB11
5	/RESX	28	DB12
6	SDA	29	DB13
7	NC	30	DB14
8	SCL	31	DB15
9	CSX	32	GND
10	DCLK	33	DB16
11	DE	34	DB17
12	VSYNC	35	DB18
13	HSYNC	36	DB19
14	GND	37	DB20
15	DB0	38	DB21
16	DB1	39	DB22
17	DB2	40	DB23
18	DB3	41	GND
19	DB4	42	LEDA
20	DB5	43	LEDA
21	DB6	44	LEDK
22	DB7	45	LEDK
23	GND		

CPT PIN FUNCTION	
1	VCC
2	SCL
3	SDA
4	/TP_INT
5	/TP_RST
6	GND

Note:

- Tolerance is ± 0.3 unless otherwise noted.
- LCM FPC matching connector: MOLEX 54132-4562 or equivalent.
- CTP FPC matching connector: MOLEX 51548-0671 or equivalent.
- For RoHS & REACH.
- Center brightness : 850 cd/m²(Typ.) 680cd/m²(Min.).
- Uniformity : 70%. (Min)
- Important dimension. ①~⑪△
- CTP IC : Sitronix ST1727

DATE:	2018/11/21	TEAM SOURCE DISPLAY TECH. LTD	
DRAWN:			
CHECK:		DWG. NO.	TST421GGU-01C
APPROVE:		UNITS	M M
		SCALE	Scale
		REV.	3
		SHEET 1 OF 1	

